

1415 Countertop Electric Deck Oven



OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

Stacking kit

□ 4" legs with adjustable sanitary feet

Project _____

Item No. _____

Quantity ____

Ovens consist of basic sections and are a complete and separate unit capable of operating alone or in combination.

All data is shown per oven section, unless otherwise indicated. *Refer to operator manual specification chart for listed model name.*

EXTERIOR CONSTRUCTION

- Stainless steel front, top and sides
- Aluminized steel back and bottom
- Drop down type doors
- 1" high-temperature mineral fiber sheet insulation on top, back, sides and bottom

INTERIOR CONSTRUCTION

- 20" x 20" x 9" (508mm x 508mm x 229mm) oven compartment interior
- Aluminized steel baking compartment liner
- Cordierite oven deck
- No. 16 gauge aluminized steel heater shelf assemblies

OPERATION

- 3 tubular type heaters (208 or 240 VAC) 3750 total watts
- Thermostat actuated contactor heater control
- Solid state digital display control with temperature range of 150° to 500°F (66° to 260°C) and a maximum 12 hour timer with audible alarm.

STANDARD FEATURES

- Fahrenheit dial 200° to 500°F
- Two year parts and one year labor warranty
- Five year limited oven door warranty*
- * For all international markets, contact your local distributor.






MODEL 1415



APPROVAL/STAMP

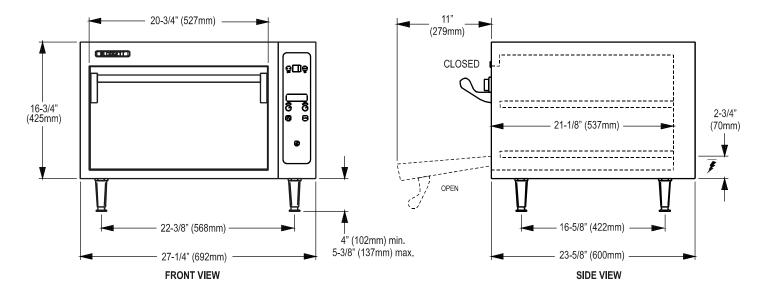

| DIMENSIONS: | Single | Double |
|--------------------------|--------------------|--------------------------------|
| Number of sections: | 1 | 2 |
| Number of controls: | 1 | 2 |
| Number of compartments: | 1 | 2 |
| Size of compartments: | 20" x 20 | " x 9" (508mm x 508mm x 229mm) |
| Clearance below oven: | 4" (102mm) minimum | |
| Counter space: | 27-3/8" | x 23-11/16" (695mm x 602mm) |
| Minimum entry clearance: | 23" (548 | 3mm) |
| Minimum entry clearance: | 23" (548 | 3mm) |

POWER SUPPLY:

.....

1400 Series (three heaters) 208 VAC, 60 Hz, 1 Phase, 3750 Watts, Line Amps 18 208 VAC, 60 Hz, 3 Phase, 3750 Watts, Line Amps 10-10-10 220-240 VAC, 60 Hz, 1 Phase, 3750 Watts, Line Amps 16 220-240 VAC, 60 Hz, 3 Phase, 3750 Watts, Line Amps 9-9-9

MINIMUM ENTRY CLEARANCE:

Uncrated 17" Crated 26"

SHIPPING INFORMATION:

| Approx. Weight: | |
|-----------------|----------------------------|
| Single: | 215 lbs. (98 kg) |
| Double: | 430 lbs. (195 kg) |
| Crate size: | 33" x 37" x 26" |
| | (838 mm x 940 mm x 661 mm) |

NOTE: The company reserves the right to make substitutions of components without prior notice

BLODGETT OVEN COMPANY

www.blodgett.com 44 Lakeside Avenue, Burlington, VT 05401 • Phone: (802) 658-6600 • Fax: (802) 864-0183