


STAINI ESS STEEL **MOBILE MIXER & EQUIPMENT TABLES**

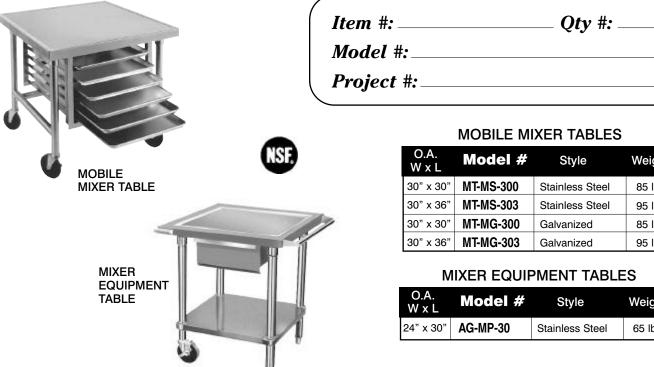

Drawer Optional

MOBILE MIXER TABLE with Tray Slides

FEATURES:

TOP is furnished with a 2" x 1" square die embossed NO-DRIP countertop offset edge with a 1/2" return on 4 sides. Cross Bracing welded to front legs. Cross Bracing on sides is bolted to legs and requires assembly.

Pan Rack Slides sized for (6) 18" x 26" pans.

MATERIAL:

MT-MS SERIES - Stainless Steel Base

TOP is 14 gauge stainless steel type "304" series with galvanized understructure.

LEGS are 1 5/8" diameter, stainless steel. Gussets are stainless steel. (4) 5" swivel casters with rubber wheels. (2) with brakes

PAN RACK is aluminum with 2" tray slide spacing.

MT-MG SERIES - Galvanized Base

TOP is 14 gauge stainless steel type "304" series with galvanized understructure.

LEGS are 1 5/8" diameter, galvanized steel. Gussets are galvanized steel.

(4) 5" swivel casters with rubber tires. (2) with brakes.

PAN RACK is aluminum with 2" tray slide spacing.

MOBILE MIXER TABLES

O.A. W x L	Model #	Style	Weight
30" x 30"	MT-MS-300	Stainless Steel	85 lbs.
30" x 36"	MT-MS-303	Stainless Steel	95 lbs.
30" x 30"	MT-MG-300	Galvanized	85 lbs.
30" x 36"	MT-MG-303	Galvanized	95 lbs.

MIXER EQUIPMENT TABLES

O.A. W x L	Model #	Style	Weight
24" x 30"	AG-MP-30	Stainless Steel	65 lbs.

MIXER EQUIPMENT TABLE

FEATURES:

TOP is furnished with a 2" x 1" square die embossed NO-DRIP countertop offset edge with a 1/2" return on 4 sides.

Aluminum die cast "leg to shelf" clamp secures shelf to leg eliminating unsightly nuts and bolts. Undershelf is adjustable.

Pre-engineered angle adapters insure ease of future drawer installation (Mixer Equipment Table Only).

Stainless steel handle and two rubber bumpers secured to table top.

MATERIAL:

AG-MP-30

TOP is heavy gauge stainless steel type "430" series with galvanized understructure.

UNDERSHELF is galvanized steel.

LEGS are 1 5/8" dia. tubular galvanized steel with galvanized steel gussets and (2) 1" adjustable plastic bullet feet.

(2) 5" swivel casters with brakes supplied.

CONSTRUCTION:

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.

All TIG welded. Exposed weld areas finished to match adjacent surfaces.

Entire Top is mechanically polished to a satin finish and is sound deadened.




Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

0.	NEW YORK	GEORGIA	TEXAS	NEVADA
	Fax: (631) 242-6900	Fax: (770) 775-5625	Fax: (972) 932-4795	Fax: (775) 972-1578

DETAILS and SPECIFICATIONS

ALL DIMENSIONS ARE TYPICAL

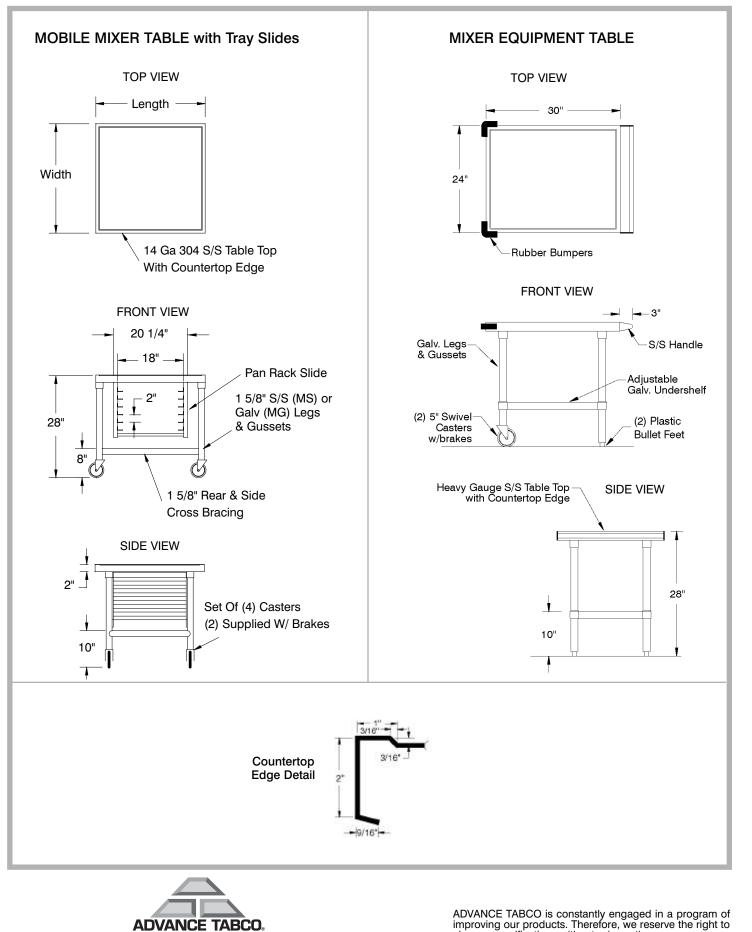

3a 200 Heartland Boulevard, Edgewood, NY 11717-8380

0-3a

TOL ± .500"

change specifications without prior notice.