

# Countertop Charbroilers

## Standard Features

- Stainless steel exterior and interior
- 35,000 BTU stainless steel burners with standby pilot
- Independent manual controls every 12"
- Heavy-duty, reversible cast iron grates
- Top grates are adjustable multi-level
- Units include lava briquettes standard
- Adjustable, stainless steel legs standard
- 3/4" NPT rear gas connection and regulator standard

### MODELS:

ATCB-24 / ATCB-36 / ATCB-48

ATCB-24



ATCB-36



ATCB-48



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Conforms to ANSI  
STD Z83.11-2009 (2011)  
Certified to CSA  
STD 1.8B-2009 (2011)  
Conforms to NSF/ANSI STD.4



## SPECIFICATIONS

Models	Burners and control method	Gas type	Intake-tube pressure (in. W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Work area (inch)	Net weight (lbs)	Gross weight (lbs)
ATCB-24	2 Burners Independent Manual Control	NG	4	35,000	70,000	4" w.c.	23 <sup>9/10</sup> × 20 <sup>1/5</sup>	136.9	168.2
		LP	10	35,000	70,000	10" w.c.			
ATCB-36	3 Burners Independent Manual Control	NG	4	35,000	105,000	4" w.c.	35 <sup>7/10</sup> × 20 <sup>1/5</sup>	190.9	238.1
		LP	10	35,000	105,000	10" w.c.			
ATCB-48	4 Burners Independent Manual Control	NG	4	35,000	140,000	4" w.c.	47 <sup>9/10</sup> × 20 <sup>1/5</sup>	247.8	313.7
		LP	10	35,000	140,000	10" w.c.			

## PLAN VIEW

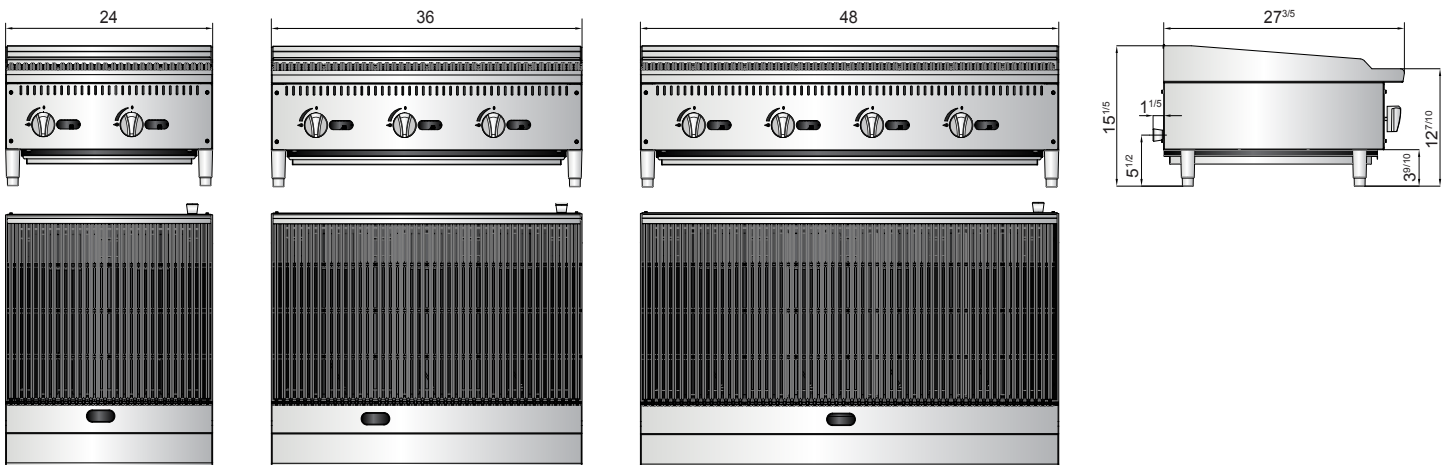

ATCB-24

ATCB-36

ATCB-48

