



BB96, BB120, BB150 & BB200D BANQUET CARTERS for plates 8-3/4" to 10-1/2" in diameter


CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT
BANQUET CARTS



BB96

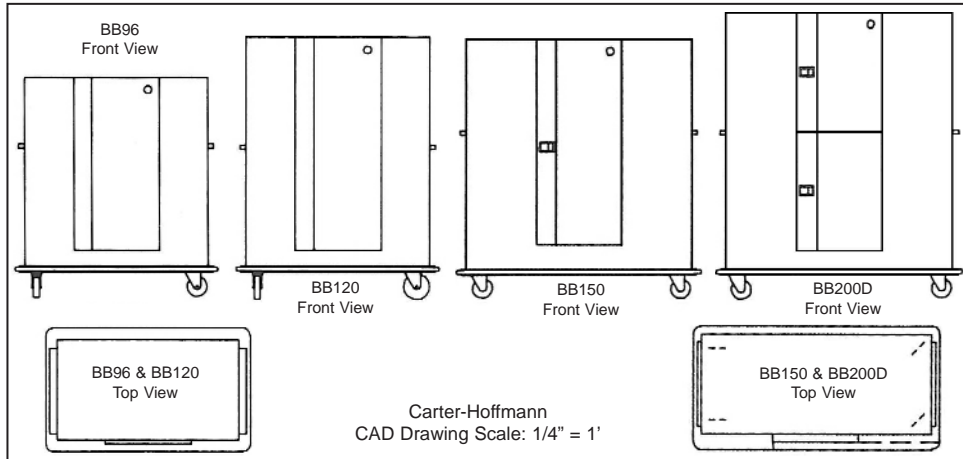

Carter-Hoffmann
CAD Drawing Scale: 1/4" = 1'

	Model Number	Plate Capacity*			Number of Shelves	Clearance Between Shelves		Shelf Size		Overall Dimensions						Caster		Shipping	
		with "P" carriers	with "C" carriers	without carriers		in	mm	in	mm	Height		Depth		Width		Diameter		Weight	
		in	mm	in		mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs	
<input type="checkbox"/>	BB96	96	120	120	3	13	330	22x42 ¹ / ₂	559x1080	54	1372	30 ¹ / ₂	777	50 ³ / ₄	1290	6	152	356	161
	# carriers	12 (8P)	12 (8C)	-															
<input type="checkbox"/>	BB120	120	144	144	3	16	406	22x42 ¹ / ₂	559x1080	64 ³ / ₄	1645	30 ¹ / ₂	777	50 ³ / ₄	1290	6	152	420	191
	# carriers	12 (10P)	12 (10C)	-															
<input type="checkbox"/>	BB150	150	180	180	3	16	406	22x53 ¹ / ₄	559x1353	64 ³ / ₄	1645	30 ¹ / ₂	777	61 ¹ / ₂	1563	6	152	472	215
	# carriers	15 (10P)	15 (10C)	-															
<input type="checkbox"/>	BB200D	160	200	200	4	13	330	22x53 ¹ / ₄	559x1353	71 ¹ / ₂	1816	30 ¹ / ₂	777	61 ¹ / ₂	1563	6	152	546	248
	# carriers	20 (8P)	20 (8C)	-															

*Capacity based on common plate depth and combined plate/cover height of 2.5". Due to the variety of plate thicknesses and depths, as well as plate cover heights; actual capacity may vary.

CONSTRUCTION... Completely welded double wall cabinet construction with outer cabinet formed and welded to base. All seams turned in to eliminate raw edges.

CABINET MATERIAL... All stainless steel construction; 20 gauge polished exterior and 24 gauge interior.

BASE FRAME... 12 gauge stainless steel full depth bolsters with 1"x1" stainless steel perimeter channel supports.

CASTERS... 6" diameter, industrial grade polyurethane casters. Two swivel and two rigid. Sealed roller axle bearing and double ball bearing swivel. Plate mounted and bolted to base in offset "wheel ahead" pattern. Two casters fitted with brakes.

BUMPER... Non-marking gray vinyl bumper set in heavy duty 3/16" extruded aluminum frame with reinforced corner "cut-outs."

INSULATION... 1" thick high density continuous wrap-around type fiberglass insulation with 1 1/2" thickness on top.

GASKET... High temperature silicone gasket.

DOORS... Welded double stainless steel door. Filled with 1" thick fiberglass insulation. BB200D features Dutch doors.

HINGES... Concealed, stainless steel hinge with 5/16" pin.

PUSH HANDLES... Two horizontal full width stainless steel tubular push handles with back-up plates. Mounted to each end of the cabinet.

LATCHES... Flush mounted, heavy-duty sliding latch(es) with exclusive grip handle.

SHELVES... Welded, duplex nickel-plated removable wire shelves.

THERMOMETER... Dial type with remote sensing bulb and sensing bulb protector. Mounted to door.

HEATING SYSTEM... Bottom mounted heater. Stainless steel construction. Removable without tools. 1600 watt inconel-sheathed heating element. High impedance protected, internally cooled

fan motor. Full range thermostat and power indicating light.

ELECTRICAL CHARACTERISTICS... Operates on 120 volts, 60 cycle, single phase, 1650 watts, 13.7 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA 5-15P plug.

PERFORMANCE... Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 20 minutes.

ACCESSORIES/OPTIONS...

- ☐ 4 wheel brakes
- ☐ Alternate electrical configurations
- ☐ On/Off heater toggle switch
- ☐ Top mounted transport latch
- ☐ Locking paddle latch
- ☐ Lexan thermometer cover
- ☐ Cold plate
- ☐ Alternate caster sizes & types
- ☐ Menu card holder
- ☐ Plate carriers - specify open "P" type or covered plate "C" type

Specifications subject to change through product improvement & innovation.

SPECIFICATIONS

Printed in U.S.A. B40 0412
Carter-Hoffmann is a trademark of Carter-Hoffmann LLC.



NSF/ANSI 4

CARTER-HOFFMANN
1551 McCormick Ave., Mundelein, IL 60060
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

www.carter-hoffmann.com

Suburban Bowery



FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981
www.carter-hoffmann.com



BB96, BB120, BB150 & BB200D BANQUET CARTERS

Since 1947, Foodservice Equipment That Delivers!

DOUBLE WALL STAINLESS STEEL CABINET...

Strongest, most durable materials for long life. High density 1" thick fiberglass in walls and door, 1 1/2" thick on top for maximum heat retention.

HEAVY-DUTY STAINLESS STEEL BASE FRAME...

12 gauge caster bolsters with perimeter frame for rugged use and added durability.



BB200D

COMPLETELY WELDED TURNED-IN SEAM CONSTRUCTION...

Adds rigidity to entire cabinet and eliminates raw edges for ease of cleaning and safety.

WRAP-AROUND BUMPER...

Full perimeter aluminum bumper with non-marking gray vinyl insert. Protects cart and facility walls from damage.

6" DIAMETER INDUSTRIAL GRADE CASTERS WITH POLYURETHANE TREAD...


Long lasting and easy rolling for maximum load and minimum maintenance. Two swivel and two rigid. Swivel casters fitted with brakes. Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces.

HIGH PERFORMANCE REMOVABLE HEATER...

Blower system for fast heat up, recovery and even heat distribution throughout cabinet. Removable without tools for easy service and cabinet cleaning.


REMOVABLE WIRE SHELVES...

Welded, duplex nickel-plated with reinforced shelf clips. Sturdy for heavy plate loads and removable for cleaning.



"C" carrier for
covered plates

OPTIONAL PLATE CARRIERS... "P" or "C" carriers are available. "P" type holds 8-3/4" to 10-1/2" diameter open plates while "C" type holds up to 10-1/2" diameter covered plates. Specify type, if any, when ordering. Carriers will hold plates 4-high (8C or 8P) in carts with 13" shelf spacing and 5-high (10C or 10P) in carts with 16" shelf spacing. See table on front page for types and quantities that will fit in each cart.

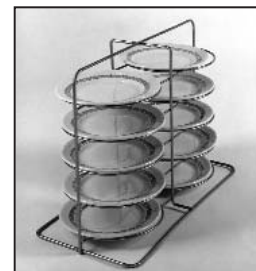

"P" carrier for
open plates



NSF/ANSI 4