




# CD252 & 260 SERIES MOBILE UNHEATED & HEATED ENCLOSED ROTARY DISH CARTS

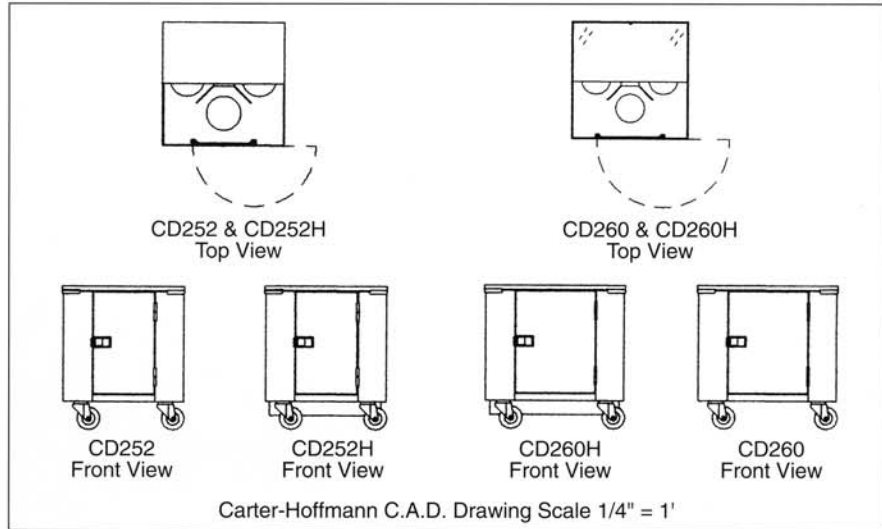

CARTER-HOFFMANN **11** FOOD SERVICE EQUIPMENT HEATED SERVERS

Model Number	Plate Capacity		Overall Dimensions						Caster Diameter		Class 100 Shipping Weight	
	11" dia. max.	12" dia. max.	Height		Depth		Width		in	mm	lbs	kgs
<input type="checkbox"/> CD252	252	—	32	813	28	711	28	711	5	127	190	86
<input type="checkbox"/> CD252H	252	—	32	813	28	711	28	711	5	127	196	89
<input type="checkbox"/> CD260	—	252	32	813	32	813	32	813	5	127	270	123
<input type="checkbox"/> CD260H	—	252	32	813	32	813	32	813	5	127	280	127

**CONSTRUCTION...** Straight line modular styling with all seams "turned in" to eliminate raw edges. Heli-spot welded to form solid cabinet.

**CABINET MATERIALS...** Nickel bearing type 304 stainless steel, 18 gauge polished exterior wall.

**CASTERS...** 5" diameter, all swivel, polyurethane tread. Sealed Delrin bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base. Two casters fitted with breaks.

**DOORS...** Full length, double panel stainless steel construction with interior cavity filled with 1" fiberglass high density insulation.

**LATCHES...** Flush mounted heavy duty sliding latch for positive door closing.

**HINGES...** Concealed, all stainless steel 12 gauge butt type hinge with 3/8" diameter fixed pin.

**HINGED COVER...** All stainless steel removable cover and lift handles. Center piano-type hinge permits cover to open for easy loading/unloading. Notched top cover allows front door to open even when top cover is closed.

**HEATING SYSTEM...** (CD252H, CD260H) High density 1400 watt inconel sheathed heating element. High impedance protected externally cooled fan motor with self-lubricating bearings.

**CORD WRAP...** (CD252H, CD260H) Keeps cord safely out-of-the-way when moving the cart.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volt, 60 cycle, single phase. 1400 watts, 11.7 amps. Eight foot 3 wire rubber cord with three prong grounding plug. NEMA 5-15P.

**ACCESSORIES/OPTIONS...**

- Full Perimeter Bumper
- Corner Bumper
- 240 V, 50 Hz
- 240 V, 60 Hz

# SPECIFICATIONS

Specifications subject to change through product improvement & innovation.

**CARTER-HOFFMANN CORP.**

1551 McCormick Ave., Mundelein, IL 60060  
Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



Suburban Bowery

Printed in U.S.A. D15 0599