BUNN®

ITEM#

PROJECT

DATE

12 Cup Automatic Coffee Brewer with 3 Lower Warmers

Model CWTF15–3*
(3 lower warmers)
(decanters sold separately)
Dimensions: 17" H x16.5" W x 17.7" D
(43.2cm H x 41.9cm W x 45cm D)

Features

12 Cup Automatic Coffee Brewer

- Brews 3.9 to 7.5 gallons (14.8 to 28.4 litres) of perfect coffee per hour.
- All stainless steel construction.
- Hot water faucet and back-up pourover feature on all CWTF models. No faucet on CWT model.
- SplashGard® funnel deflects hot liquids away from the hand.
- International electrical configurations available.

Model CWT15–3*
(no faucet)

For current specification sheets and other information, go to *www.bunn.com*.

** International models may vary in appearance.*

Related Products

Easy Clear® EQ-17-TL
Product No. : 30200.1000
Dimensions:
$12\frac{7}{16}$" H x $2\frac{1}{2}$" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL
Product No. : 30201.1001
Dimensions: $8\frac{1}{4}$" H x $2\frac{5}{16}$" Dia.
20.95 cm H x 5.87 cm Dia.

Paper Filter Pack
Product No. : 20115.0000
Packed per case: 1,000
Dimensions: $4\frac{1}{4}$" Base x $2\frac{3}{4}$" Sidewall
10.8 cm Base x 6.98 cm Sidewall

Easy Pour® black decanter
Product No. : 06100.0101
Quantity: 1 *(also packaged in quantities of 2, 3, 6, 12, & 24)*

Easy Pour® orange decanter (for decaf)
Product No. : 06101.0101
Quantity: 1 *(also packaged in quantities of 2, 3, 6, 12, & 24)*

1GPR SS Portable Server on an RWS1 Warmer
1GPR Product No. : 12487.0001*
RWS1 Product No. : 12203.0010
**Also available with side handles or black decor.*

Model	Agency Listing
CWT15-3	UL LISTED NSF
CWTF15-3	UL LISTED NSF
CWTF20-3	UL LISTED NSF
CWTF35-3	UL LISTED NSF

Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cubic Measure	Shipping Weight	Cord Attached
CWT15–3††	12950.0112	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft³	32 lbs.	Yes
CWTF15–3	12950.0212	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft³	35 lbs.	Yes
CWTF15–3*	12950.0216	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft³	36 lbs.	Yes
CWTF20–3	12950.0232	120	17.9	1800	2150	5.3 gal./hr.	6.4 ft³	35 lbs.	No
CWTF35–3	12950.0252	120/208-240	17.1†	3500	3850	7.5 gal./hr.	6.4 ft³	35 lbs.	No
CWTF15 (3 left lower warmers)	12950.0298	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft³	35 lbs.	Yes
CWTF35*	12950.0381	120/208-240	17.1†	3500	3850	7.5 gal./hr.	6.4 ft³	39 lbs.	No

**Stainless steel funnel †Current at 240 Volts ††No faucet*

Brewing capacity: *based upon incoming water temp of 60ºF/15˚C (140ºF/60˚C rise) per 1/2 gallon brew time of 4 minutes.*
Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Model 15 requires 2-wires plus ground service rated 120V, single phase, 60 Hz.
Model 20 requires 2-wires plus ground service rated 120V, single phase, 60 Hz.
Model 35 requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male flare fitting.

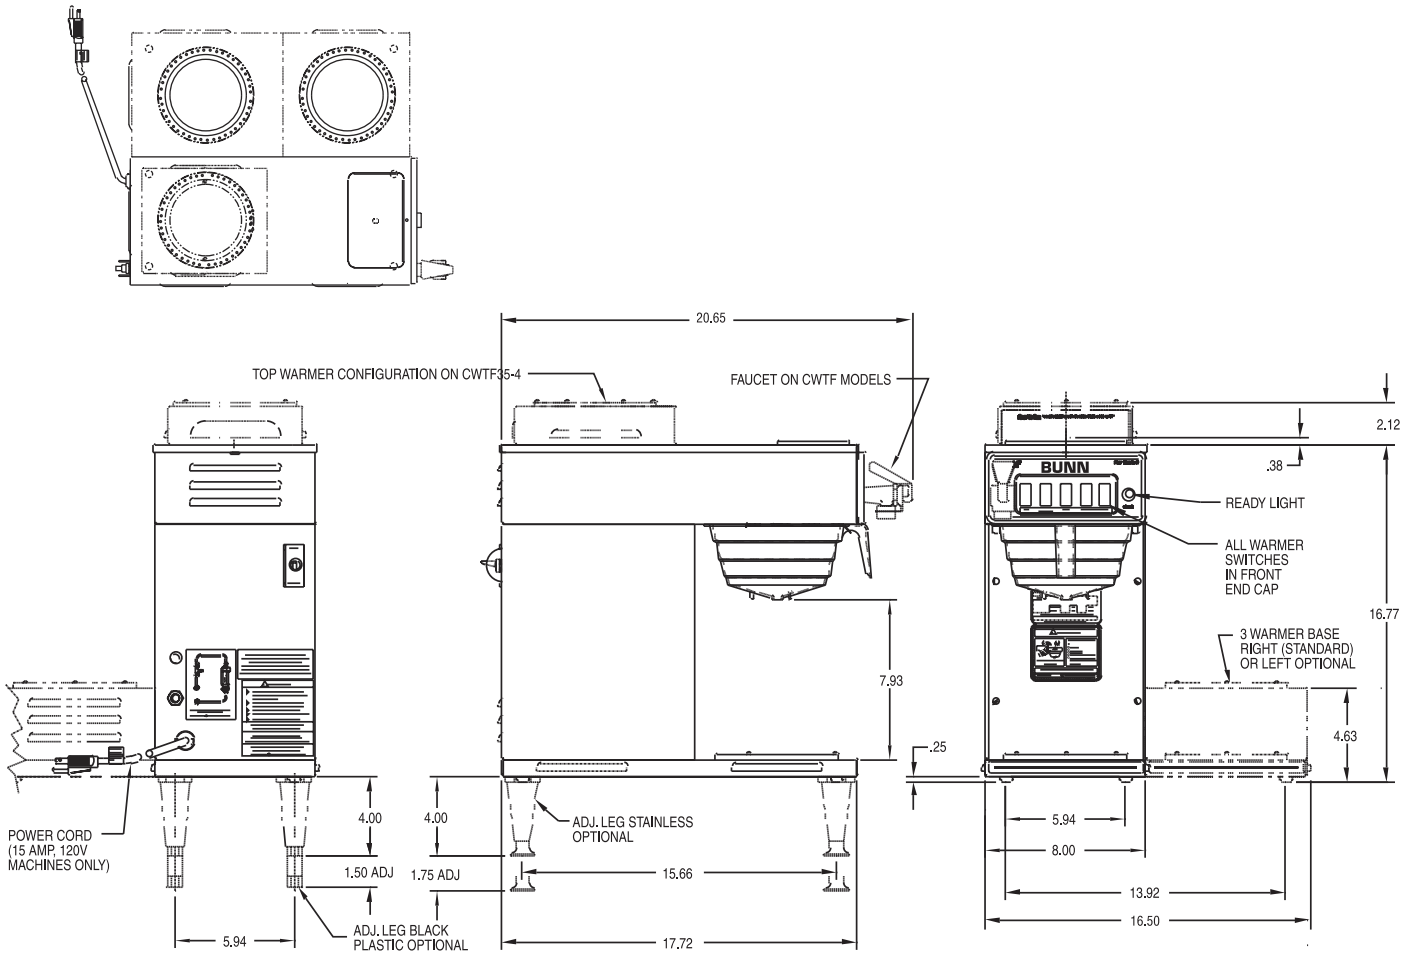

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

7/09 © Bunn-O-Matic Corporation