




PH1200, PH1215, PH1225 & PH1250 MOBILE HEATED SERVERS FOR BULK FOODS

CARTER-HOFFMANN

11 FOOD SERVICE EQUIPMENT
HEATED SERVERS



PH1225

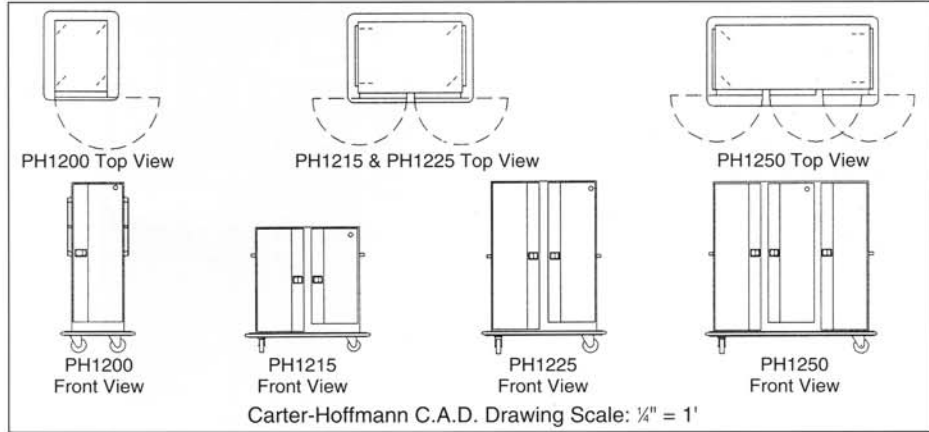

Carter-Hoffmann C.A.D. Drawing Scale: 1/4" = 1'

| Model Number | Pan Capacity | Inside Working Height in mm | Overall Dimensions | | | | | | Caster Diameter in mm | Shipping Weight | |
|---------------------------------|------------------|--------------------------------|--------------------|----------------|----------------|-------|-----|-----|--------------------------|-----------------|--|
| | 12 x 20 x 2 1/2" | | Height in mm | Depth in mm | Width in mm | in mm | lbs | kgs | | | |
| <input type="checkbox"/> PH1200 | 16 | 46 1168 | 58 1473 | 29 1/2 749 | 24 610 | 5 127 | 201 | 91 | | | |
| <input type="checkbox"/> PH1215 | 21 | 30 762 | 42 1067 | 29 1/2 749 | 41 1/2 1045 | 5 127 | 250 | 114 | | | |
| <input type="checkbox"/> PH1225 | 33 | 46 1168 | 58 1473 | 29 1/2 749 | 41 1/2 1045 | 5 127 | 300 | 136 | | | |
| <input type="checkbox"/> PH1250 | 50 | 46 1168 | 58 1473 | 29 1/2 749 | 56 1/2 1441 | 5 127 | 410 | 186 | | | |

CONSTRUCTION... Completely welded cabinet construction and top corners, with outer cabinet formed to base and welded. All seams turned in to eliminate raw edges.

CABINET MATERIALS... Nickel-bearing type 300 series stainless steel, 20 gauge polished exterior wall, 24 gauge interior.

BASE FRAME... 12 gauge stainless steel full depth bolsters with 1" x 1" stainless steel perimeter channel supports.

CASTERS... 5" diameter, two rigid, two swivel polyurethane tread except for PH1200. All casters to be swivel type. Sealed delrin bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base in offset wheel-ahead pattern. Two casters fitted with brakes.

BUMPER... Non-marking gray vinyl bumper set in heavy-duty 3/16" extruded aluminum frame with reinforced corner "cut outs."

INSULATION... High density fiberglass insulation; 1" thick continuous wrap-around type.

DOORS... Double panel stainless steel 20 gauge polished exterior and 24 gauge interior. Filled with 1" thick high density fiberglass insulation.

GASKETS... High temperature gasket.

LATCHES... Flush mounted, heavy duty sliding with exclusive grip handle.

HINGES... Concealed, stainless steel hinge with 5/16" pin.

HANDLES (TWO)... Horizontal full width heavy duty aluminum push handles with back-up plates. (Note: PH1200 unit to have two vertical push handles as shown.)

PAN/TRAY SLIDES... Removable stainless steel assemblies, 20 gauge channel-type slides spaced on 2 3/4" centers.

THERMOMETER... Dial type with sensing bulb and bulb protector.

HEATING SYSTEM... Bottom mounted heater. Stainless steel construction. Removable without tools. 1600 watt inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat and power indicating light.

ELECTRICAL CHARACTERISTICS... Operators on 120 volts, 60 cycle, single phase, 1650 watts, 13.7 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA 5-15P.

PERFORMANCE... Capable of heating to 200°F (94°C). Preheat to 160°F (71°C). Approximately 25 minutes.

ACCESSORIES/OPTIONS...

- Heater with on/off switch
- Heater with remote thermostat and probe, heater hold downs
- Heater with remote thermostat and probe, heater hold downs, on/off switch, removable power cord (locking)
- 220 volt, 1700 watts, 50/60 hz
- 240 volt, 2023 watts, 50/60 hz
- Menu card holder
- Top mount heavy duty transport latch
- Stainless steel push handles
- Removable canned heat
- Heater cover assembly (no heat)

SPECIFICATIONS

Printed in U.S.A. F15 0599

Specifications subject to change through product improvement & innovation.

CARTER-HOFFMANN CORP.

1551 McCormick Ave., Mundelein, IL 60060
Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

www.carter-hoffmann.com

Suburban Bowery

