




PH125, PH128 & PH129 HEATED TRANSPORT CARTS

(with top mounted forced air heating system)
For 12" x 20" x 2 1/2" Pans

CARTER-HOFFMANN
11
FOOD SERVICE EQUIPMENT
HEATED TRANSPORT CARTS

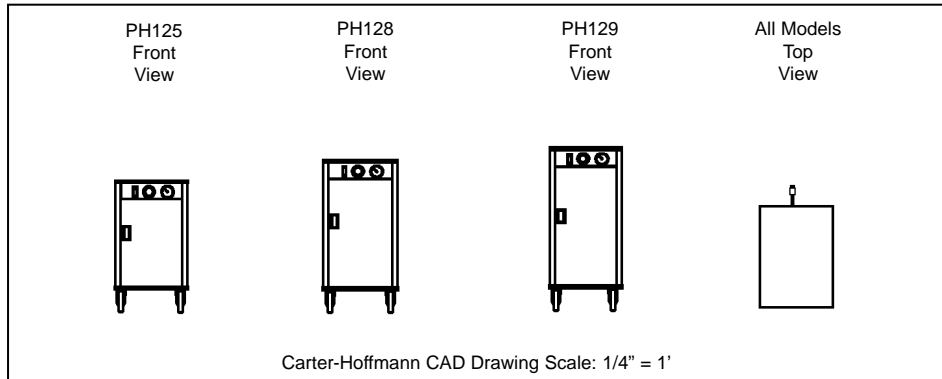

Model Number	Tray/Pan Capacity 12" x 20" x 2 1/2"	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
				Height		Depth		Width					
		in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs
<input type="checkbox"/> PH125	5	20 1/2	521	28 1/2	724	25 1/8	638	17 7/8	454	3	76	110	50
<input type="checkbox"/> PH128	8	23 5/8	600	37 3/4	946	25 1/8	638	17 7/8	454	4	102	128	58
<input type="checkbox"/> PH129	9	26	660	40 1/2	1029	25 1/8	638	17 7/8	454	4	102	134	61

CONSTRUCTION... Completely welded cabinet construction with outer cabinet welded to cabinet liner and bolted to base.

CABINET MATERIAL... All stainless steel construction; 20 gauge polished exterior and 20 gauge interior.

BASE FRAME... 12 gauge stainless steel full depth bolsters with 1"x1" stainless steel perimeter channel supports.

CASTERS... Heavy-duty casters with rubber tread. Double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base. Two casters fitted with brakes. PH125 has 3" black rubber casters; PH128 & PH129 have 4" grey rubber casters.

INSULATION... High density fiberglass, full 1" thick continuous wrap-around type in top, bottom and sides.

DOORS... Recessed within cart walls, top and base. Welded double panel stainless steel 20 gauge polished exterior and 20 gauge interior. Filled with 1" thick high density fiberglass insulation. Flush-mounted, gasketless design.

HINGES... 12 gauge stainless steel butt hinges with 3/8" diameter stainless steel pins, fully welded to cabinet and doors.

LATCH... Flush mounted heavy duty slide latch for positive door closure.

TRAY RACK ASSEMBLIES... Removable 16 gauge stainless steel tray racks with 20 gauge stainless steel channel slides. Channel slides welded to rack assemblies and spaced on 2 3/4" centers.

THERMOMETER... Dial type with remote sensing bulb. Set flush with control panel.

HEATING SYSTEM... Top mounted heater with inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat and on/off switch with power indicating light.

ELECTRICAL CHARACTERISTICS... Operates on 120 volts, 50/60 cycle, single phase, 1000 watts, 8.3 amps. Six foot 3 wire rubber cord with 3 prong grounding plug. NEMA 5-15P.

PERFORMANCE... Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 20 minutes.

ACCESSORIES/OPTIONS...

- Heavy-duty aluminum bumper
- Menu card holder
- Alternate wheel sizes and treads
- 4" Legs in lieu of casters
- Transport latch with padlock hasp
- Rack and heater security hold downs
- Alternate electrical configurations
- Contact factory for other options on volume orders

Specifications subject to change through product improvement & innovation.

SPECIFICATIONS



CARTER-HOFFMANN
1551 McCormick Ave., Mundelein, IL 60060
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981
www.carter-hoffmann.com

Suburban Bowery

Printed in U.S.A. F09 0612
Carter-Hoffmann is a trademark
of Carter-Hoffmann, LLC

FEATURES & BENEFITS

PH125, PH128 & PH129 HEATED TRANSPORT CARTS

Since 1947, Foodservice Equipment That Delivers!

HIGH PERFORMANCE CONVECTION HEATER...

Heating system located in top of cabinet with blower for quick heat up and recovery and even heat distribution throughout the cabinet.

STAINLESS STEEL CONSTRUCTION...

All stainless steel interior and exterior for easy sanitation and long lasting appearance.

REMOVABLE STAINLESS STEEL TRAY RACKS...

Makes routine cleaning simple and quick.

STAINLESS STEEL CASTER BASE...

Mobile, for cabinet versatility.



TOP-MOUNTED CONTROLS...

Easy access for simple operation and accurate temperature monitoring.

GASKETLESS DOOR...

Pocket design, flush mounted door seals in heat and eliminates need for gasket.

HEAVY-DUTY SLIDING LATCH...

Flush mounted for protection from damage. Ensures positive closure and rugged longevity.

HEAVY-DUTY DOOR HINGES...

Long lasting and durable for frequent opening and closing of doors.

HIGH DENSITY FIBERGLASS INSULATION...

Insulation in cabinet sides, top, bottom, and door for maximum heat retention and efficiency.

PH128

1551 McCormick Avenue, Mundelein, Illinois 60060
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981
www.carter-hoffmann.com

