



# PH1815 & PH1835 HEATED TRANSPORT CARTS (top mounted heating system) Universal Slides


CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT  
HEATED TRANSPORT CARTS

# SPECIFICATIONS

Printed in U.S.A. F26 0612  
Carter-Hoffmann is a trademark  
of Carter-Hoffmann LLC

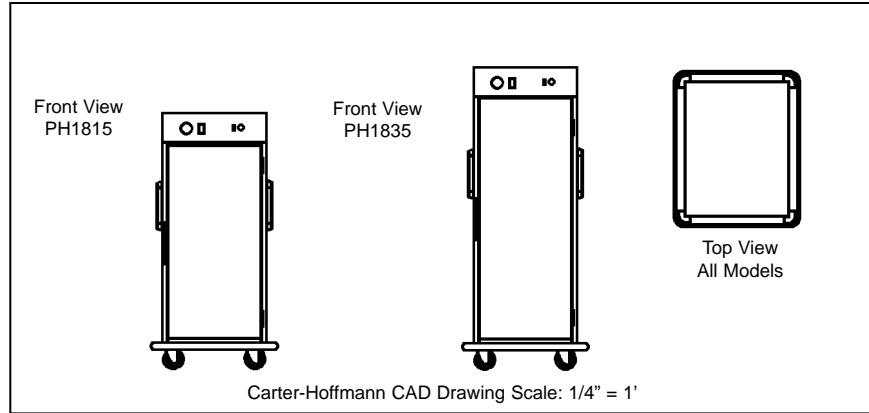

Model Number	Tray/Pan		Slide Pairs	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
	Capacity*			in	mm	Height		Depth		Width		in	mm	lbs	kgs
	18"x 26"	12"x 20"				Standard	in	mm	in	mm	in				
PH1815	12	24	12	45 <sup>3</sup> / <sub>4</sub>	1162	61 <sup>1</sup> / <sub>2</sub>	1562	38	965	31 <sup>1</sup> / <sub>2</sub>	800	6	152	425	193
PH1835	15	30	15	57 <sup>1</sup> / <sub>2</sub>	1461	75 <sup>1</sup> / <sub>4</sub>	1911	38	965	31 <sup>1</sup> / <sub>2</sub>	800	6	152	532	241

\* Capacity shown at 3 1/2" spacing. Tray slides adjustable on 1 3/4" increments. Universal models will accommodate Gastronorm 2/1 pans (1 per slide), 1/1 pans (2 per slide) And 12"x20" glass racks.

**CONSTRUCTION...** Completely welded cabinet construction and top corners, with outer cabinet formed to base and welded. All seams turned in to eliminate raw edges.

**CABINET MATERIAL...** All stainless steel construction; 20 gauge polished exterior and 24 gauge interior.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1"x1" 14 gauge stainless steel perimeter tube supports welded to bolsters.

**CASTERS...** 6" diameter, all swivel, polyurethane tread. Sealed roller bearing and double ball bearing swivel. Zerk grease fittings. Plated mounted and bolted to base in offset wheel-ahead pattern.

**BUMPER...** Non-marking gray vinyl bumper set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cutouts.

**INSULATION...** High density fiberglass, full 1" thick continuous wrap-around type fiberglass insulation.

**DOORS...** Double panel stainless steel with heavy-duty vinyl gasket; 20 gauge polished exterior and 24 gauge interior. Filled with 1" thick high density fiberglass insulation.

**HINGES...** Adjustable edgemount hinges with chrome plated finish.

**LATCH...** Heavy-duty edge-mount latch for positive closing of door.

**HANDLES...** Two heavy-duty aluminum push handles, vertically mounted and welded to cabinet.

**TRAY RACK ASSEMBLIES...** 16 gauge universal slides, fully adjustable at 1-3/4" spacing, placed into 18 gauge stainless steel baffles. Standard spacing at 3-1/2". Each cabinet comes standard with a full set of slides for maximum capacity.

**THERMOMETER...** Dial type with remote sensing bulb. Set flush with control panel.

**HEATING SYSTEM...** Top mounted, all stainless steel construction. 1500 watt inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Manual reset high-limit switch to protect all internal components.

Features include removable large capacity humidifying pan, on/off rocker switch, power indicating light, thermostat control knob, recessed 12 gauge stainless steel cord wrap, remote thermostat sensing bulb.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volts, 60 cycle, single phase, 1500 watts, 13 amps. Ten foot 3 wire rubber cord with 3 prong grounding plug. NEMA 5-15P.

**PERFORMANCE...** Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 25 minutes.

**ACCESSORIES/OPTIONS...**

- Side-mounted transport latch with padlock hasp
- Locking Door Latch
- Tamper Resistant Fasteners
- Alternate Caster Sizes and Types
- Thermometer Protector Cover
- Rack & Heater Security Hold Downs
- Menu Card Holder
- PH1835 Only:
  - pass-through door
  - Dutch door
  - pass-through, Dutch door (Dutch on front, full solid on back)

Specifications subject to change through product improvement & innovation.

**CARTER-HOFFMANN**

1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)

Suburban Bowery



# FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060  
 Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



## PH1815 & PH1835 HEATED TRANSPORT CARTS


*Since 1947, foodservice equipment that delivers!*

### TOP MOUNTED HEATER...

Blower heating system with side mounted interior heat ducts for fast heat up, recovery and even heat distribution throughout cabinet. Removable without tools for easy maintenance and cleaning.

### NON-MARKING BUMPER SET IN HEAVY-DUTY 3/16" THICK EXTRUDED ALUMINUM FRAME...

Protects doorways, walls and cart from damage. "Floating" bumper is attached to, but separate from cabinet base. Bumper absorbs the majority of impacts and protects integrity of entire cart from damage.

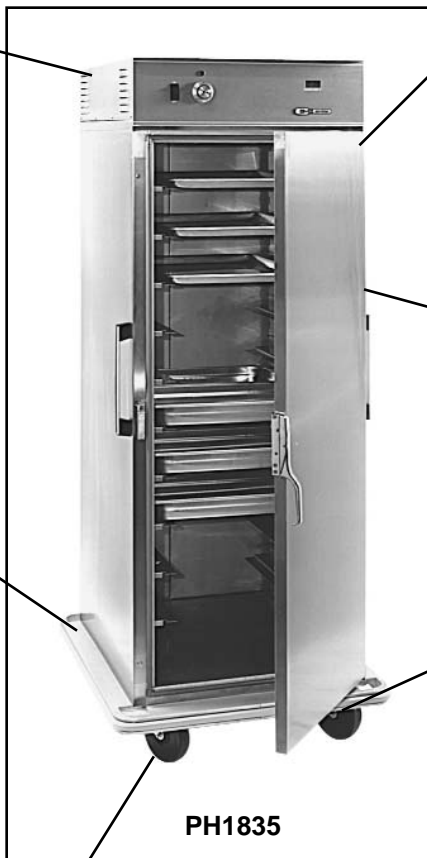

### COMPLETELY WELDED TURNED-IN SEAM CONSTRUCTION...

Adds rigidity to entire cabinet and eliminates raw edges for easy cleaning and safety.

### DOUBLE WALL STAINLESS STEEL CABINET...

Strongest, most durable materials for longest life. Fully insulated for maximum heat retention. Energy Star.

### HEAVY-DUTY CASTER BOLSTERS...

12 gauge full depth bolsters with 1"x1" stainless steel perimeter channel supports. Provide greater load strength, accepting heavier shocks. Ideal for heavy loads and harsh transport conditions.

### POLYURETHANE TREAD CASTERS WITH SEALED ROLLER BEARING...

Long lasting, easy rolling for maximum load and minimum maintenance.



**OFFSET "WHEEL-AHEAD" PATTERN...** Only one wheel can pass over uneven surfaces at a time for easy handling and steering.



**VERSATILE PAN SLIDES...** Adjustable, universal pan slides accept both 12"x20" and 18"x26" pans as well as Gastronorm pans. Fully adjustable on 1.75" centers. Standard spacing at 3.5". Cabinets come with a full set of slides for maximum capacity.

