
Carter-Hoffmann is a trademark of Carter-Hoffmann, LLC



PERFORMANCE SERIES **ENCLOSED MOBILE TRAY CARTS**

Single Door for 14"x18", 15"x20", 16"x22", 12"x19", 12"x20", 12"x22", 13"x21" and Room Service Trays

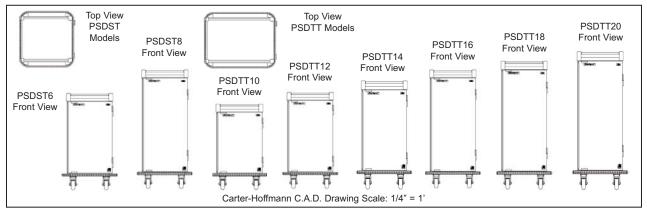

Model	Tray Capacity	Inside Working			С	verall Di	Caster		Shipping				
Number	5.75" Standard	He	ight	Heigl		ght De		Width		Diameter		Weight	
	Spacing												
	1 tray/slide; end-loaded	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs
PSDST6	6	35 ¹ / ₄	895	49 ¹ / ₄	1251	27 ⁷ /8	708	29	737	6	152	239	108
PSDST8	8	46 ³ / ₄	1187	60 ³ / ₄	1543	27 ⁷ /8	708	29	737	6	152	252	114

Model	Tray Capacity Inside Working		Working	Overall Dimensions							Caster		Shipping	
Number	5.75" Standard	Height		Height		Depth		Width		Diameter		Weight		
	Spacing													
	2 trays/slide; side-loaded	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs	
PSDTT10	10	29 ¹ / ₂	749	431/2	1105	36 ⁷ /8	936	29	737	6	152	290	132	
PSDTT12	12	35 ¹ / ₄	895	49 ¹ / ₄	1251	36 ⁷ /8	936	29	737	6	152	318	144	
PSDTT14	14	41	1041	55	1397	36 ⁷ /8	936	29	737	6	152	325	147	
PSDTT16	16	46 ³ / ₄	1187	60 ³ / ₄	1543	36 ⁷ /8	936	29	737	6	152	332	151	
PSDTT18	18	52 ¹ / ₂	1334	66 ¹ / ₂	1689	36 ⁷ /8	936	29	737	6	152	260	163	
PSDTT20	20	58 ¹ / ₄	1462	72 ¹ / ₄	1835	36 ⁷ /8	936	29	737	6	152	370	168	

CONSTRUCTION...Completely welded cabinet construction. Ultra-quiet construction with sound-dampening features. Cabinet formed and welded to base. All seams turned in to eliminate raw edges. Drain plug with tether.

 $\overline{\Box}$ $\overline{\Box}$

> VENTS...Vents on both ends to allow escape of excess heat and moisture.

TOP... Marine edge top to contain spills. Three-sided top rail with red corners.

CABINET MATERIAL...Nickel-bearing type 300 series stainless steel; 18 gauge polished exterior walls.

BASE FRAME...12 gauge stainless steel full depth bolsters.

CASTERS...6" Performa rubber casters with noise supression bearing covers Sealed roller bearing and double ball bearing swivel with cart wash resistant

Glacier FM grease. Plate mounted and bolted to base in offset wheel ahead pattern. Two swivel with brakes and two rigid.

BUMPER...Full perimeter, non-marking red vinyl bumper set in heavy-duty wraparound 3/16" extruded aluminum frame with reinforced corner cut-outs.

DOOR...Double panel welded stainless steel door. Two pin hinges bolted to cabinet; hinged on right. Cavity filled with with 1" thick high density fiberglass insulation. Full length integrated door handle with magnetic closure and magnetic door-open feature. 270 degree door swing.

HINGES...12 gauge all stainless steel hinges with 3/8" pin.

PUSH HANDLE... On shorter carts, the 3-sided top rail serves as the push

handle. On taller carts, a 1" diameter tubular stainless steel handle mounted is on the swivel end; extends the full depth of the cabinet.

TRAY RACK ASSEMBLIES...Ultra-quiet with adjustable pin positions; assemblies are removable without tools and constructed of 18 gauge stainless steel. Welded-on tray slides with fixed standard spacing on 5.75" centers.

ACCESSORIES/OPTIONS
☐Pass-through
☐4-sided top rail
☐Alternate caster sizes and types
☐2 or 3 thermal airpots with rack
☐Mini-Dome chillable condiment bin
☐Condiment organizer
☐Menu card holder (specify 8.5"x11" or
□5"x7")
☐Dry erase board
☐Anti-slip mat for top of cart
Remove top rail

Specifications subject to change through product improvement & innovation.

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060 (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

www.carter-hoffmann.com

Suburban Bowerv



Tel. (847)362-5500 · (800)323-9793 · Fax (847)367-8981

PERFORMANCE SERIES ENCLOSED MOBILE TRAY CARTS

Since 1947, Foodservice Equipment That Delivers!



PSDTT10 (shown with optional coffee & tea service)

DOUBLE PANEL DOOR...

Insulated, flush mounted door with fully-integrated door handle and stainless steel hinges. 270 degree door swing with magnetic closure and door-open feature.

ULTRA-QUIET CONSTRUCTION... Sounddampening features with corrosion-resistant 300 series stainless steel; easy to clean and structurally sound for long life.

STAINLESS STEEL HINGES...

Heavy-duty, 12 gauge hinges with 3/8" diameter pin for trouble-free door operation. 270 degree door swing.



VENTED END PANELS... Allow excess heat and moisture build-up to escape, while maintaining highest food quality.



ULTRA-QUIET RACKS... with adjustable pin positions to accommodate a variety of tray sizes. Tray spacing fixed on standard 5.75" centers.



PERFORMA CASTERS WITH NOISE SUPPRESSION BEARING COVERS... 6" diameter industrial grade casters with non-marking red rubber cushioned tread. Rust resistant Delrin bearings with cart wash resistant Glacier FM grease. Long lasting and easy rolling, yet durable enough to withstand rigorous cart wash programs. Two fixed and two swivel casters for easy maneuvering.



WHEEL-AHEAD CASTER CONFIGURATION... Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces. Allow for easy handling and steering.

