

# Model SRTE14 and SRTE14-2 **Electric Rethermalizer**



#### STANDARD FEATURES

- Digital controller with timers
- Tank rack
- Automatic water fill with bypass switch
- Drain Valve Interlock
- Common drain outlet
- Cleaning Brush
- Adjustable 6" (15.2cm) Legs
- Hinged Cover

## **OPTIONS & ACCESSORIES** (AT ADDITIONAL COST)

- □ Computer I-8 with 8 product timers
- □ Adjustable 6" (15.2cm) Swivel Casters
- □ Food rack (see charts)
- □ Suitcase / Basket (see charts)
- Water hose with quick disconnect
- 1/3 Pan rails
  - □ Set of 2 for single tank
  - Set of 3 for dual tank
- Stainless steel cabinet sides
- Stainless steel cabinet back

Project	
Item No	
Quantity	

## STANDARD SPECIFICATIONS CONSTRUCTION

- Tri-Element stainless heaters in our improved tank offers more capacity in the same space. Up to 50% more production over past models
- Stainless steel tank.
- Welded tank with an extra smooth peened finish ensures easy cleaning.
- Tank overfill protection, safely diverts water to common drain outlet.
- 1" NPT full port (2.54 cm) drain valve, for quick draining.
- Stainless steel hinged cover saves energy by keeping heated water vapors in the tank.
- Cabinet: polished stainless steel front, door and splash back. Aluminized steel sides and back.
- Heavy Duty 3/16" (.48 cm) door hinge.

#### **CONTROLS**

- Digital temperature display with 2 product timers.
  - Optional: Computer with 8 product timers.
- Automatic water fill system with in-line strainer, maintains the correct water level for ease of use.
- Level control safely prevents a heat cycle unless tank water level is in operating range.
- Temperature limit switch safely shuts off all heaters if the appliance temperature exceeds the upper limit.

Optional Rack / Basket Chart								
Part No.	Description	Inside Product Opening (W x H x D)	Qty Per Tank	Product Per Rack	Total Product Capacity			
B4511601	Basket, Wide	5 1/4" x 12" x 15"	2					
B4511501	Basket, Narrow	2 7/8" x 11"x 15 1/2"	3					
B4511102	Suitcase, Wide	1 1/4" x 9 5/8"x 13"	8					
B4511101	Suitcase, Narrow	5/8" x 9 5/8" x 13"	9					
B4513301	Suitcase, Tall wide	1 1/4" x 13"x 9"	12					
B4513302	Suitcase, Tall narrow	5/8" x 13" x 9"	12					
B4511001	Rack, Vertical	1 7/8" wide	1	8	8			
B4509402	Rack, Taco 8	2" wide	1	8	8			
B4513001	Rack, Taco 6	2" wide	2	6	12			



Printed in the USA










L10-238 Rev 4 02/07

## Model SRTE14 and SRTE14-2 Electric Rethermalizer

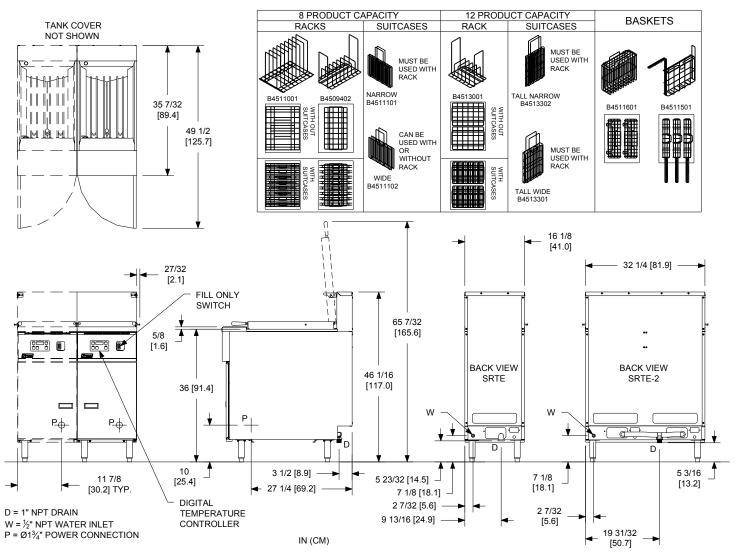

INDIVIDUAL RETHERMALIZER SPECIFICATIONS													
Mo	odels	Cooking Area				Cook Depth			Water Capacity				
SRTE14	( per Tank) 1	4 1/8 x 19 1/2 in (35.6 x 49.5 cm)			.5 cm)	11-1/4 in (28.6 cm)			16 1/2 gal (62.5 liters)				
RETHERMALIZER SHIPPING INFORMATION (Approximate)													
ı	Models	Weight		,	Shipping Crate Size H x W x L				x L	Shipping Cube			
S	SRTE14	190 l	190 Lbs (86.2 Kg)		58	8 x 22 x 44 in (147 x 57 x 113 cm				cm)	cm) 27 ft <sup>3</sup> (0.8 m <sup>3</sup> )		
SI	RTE14-2	380 lk	0 lbs (172.4 Kg) 57 x 36 x 47 in (144.8 x 91.4 x 119.4 cm)			53 ft <sup>3</sup> (1.5 m <sup>3</sup> )							
	ELECTRICAL REQUIREMENTS												
Phase ( # of Wire)		Single Phase			3 Phase			3 Phase "Y"					
		(2 wire + ground)			i)	(3 wire + ground)			(4 wire + ground)				
Model	Voltage (50/60 hz	208	220	230	240		208	220	240	380/220	400/230	415/240	
SRTE ** ( per Tank )	Nominal AMPS	38	41	43	44		22	24	26	14	15	16	
	per Line	30	71	73	77		22	24	20	14	13	10	
	KW/HR	8	8.9	9.8	10.7	,	8	8.9	10.7	8.9	9.8	10.7	

## **SHORT FORM SPECIFICATION**

\*\* Each SRTE unit requires its own separate power cord supply to operate.

Provide Pitco Model SRTE14 or SRTE14-2 Electric Rethermalizer. Each Rethermalizer unit shall have one stainless steel water tank utilizing immersion type heating elements with stainless steel sheath. Each Rethermalizer shall have a digital controller with timers, automatic water fill, hinged cover. Provide accessories as follows:

#### **TYPICAL APPLICATION**

Rethermalizing a wide variety of precooked prepackaged products such as soups, vegetables, meat, entrees, sauces, etc.



