

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

## DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

MODEL: DD50HC-1-B

DD50HC Solid Door Single Tower With Dual Faucets Hydrocarbon Series



#### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Club top
- · Stainless steel interior lining
- Stainless steel back
- Glass door
- Shelves
- Shelf clips
- · Custom tower hole location
- Drip tray location option
- · Wine models
- Faucet locks
- Glass rinser
- · Right or left hinged door
- 2"- 3" Casters or 6" black legs
- 1- 6 Tap tower
- 2, 3 & 4 way manifolds
- · Dual tap placement option
- No draft/hole cover option
- Remote option\* (see note on back on page)

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior features durable black painted steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsill are heavy-duty stainless steel
- Full electronic control
- Single tower with dual faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing doors with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible doors (hinge kit not included)
- · Compressor available on left or right, specify at time of unit order

### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	DD50HC-1-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	50 ½"	
Depth Overall	29"	
Height Overall (floor to top of tap)	52 ½"	
Number of Doors	2	
Depth with Door Open 90°	46 ¾"	
Door Openings (in)	17 1/8" x 30"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	17.86	
Internal Width Useable (in)	37 ¾"	
Internal Depth Overall (in)	23 1⁄8"	
Internal Height Overall (in)	27 <sup>3</sup> /8"	
Number of 1/2 Kegs	2	
ELECTRICAL DATA		
Full Load Amperes	2.5	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1702	
Heat Rejection (BTU/Hr)	2553	
Charge (lbs/grams)	0.2094/95	
SHIPPING DATA		
Gross Weight - Crated	290 lbs	
Height - Crated	42"	
Width - Crated	53"	
Depth - Crated	31"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



# Bar Equipment-Direct Draw Beer Dispenser Model: DD50HC-1-B

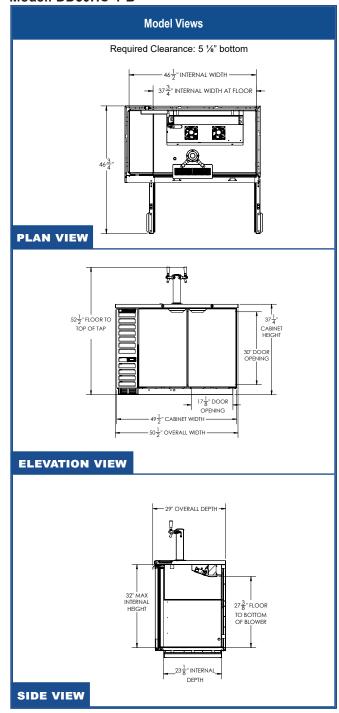







115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.