BEVERAGE-AIR

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD94HC Solid Door Dual Towers With Dual Faucets Hydrocarbon Series



OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Twelve tap tower
- · Stainless steel interior lining
- Stainless steel back
- · Glass door
- Shelves
- Shelf clips
- Custom tower hole location
- Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- Right or left hinged door
- 2"- 3" Casters or 6" black legs
- 1-6 Tap tower
- 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option* (see note on back on page)

: 🕀 115 🦁 🖉 🖊 k ci R 🕰 🥮



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

MODEL: DD94HC-1-B

5 Year Parts/Labor Warranty Available

7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel with galvanized steel back
- Top and drip tray are heavy-duty stainless steel
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy-duty stainless steel
- Full electronic control
- Dual towers with dual faucets

- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing doors with 120° stay-open feature
- · Magnetic gaskets provide positive door seal
- Field reversible doors (hinge kit not included)
- · Compressor available on left or right, specify at time of unit order

REFRIGERATION SYSTEM


- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F




BEVERAGE-AIR.

MODEL	DD94HC-1-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	95"	
Depth Overall	29"	
Height Overall (floor to top of tap)	52 ½"	
Number of Doors	3	
Depth with Door Open 90°	50 ½"	
Door Openings (in)	21" x 30"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	37.82	
Internal Width Overall (in)	82 ¼"	
Internal Depth Overall (in)	23 1⁄8"	
Internal Height Overall (in)	27 ¼"	
Number of 1/2 Kegs	5	
ELECTRICAL DATA		
Full Load Amperes	5.5	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2392	
Heat Rejection (BTU/Hr)	3588	
Charge (lbs/grams)	0.2535/115	
SHIPPING DATA		
Gross Weight - Crated	458 lbs	
Height - Crated	45"	
Width - Crated	97"	
Depth - Crated	32"	
Depth - Crated 32" 'NOTE: Remote units are field wired and come with 6" leas.		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Bar Equipment-Direct Draw Beer Dispenser Model: DD94HC-1-B

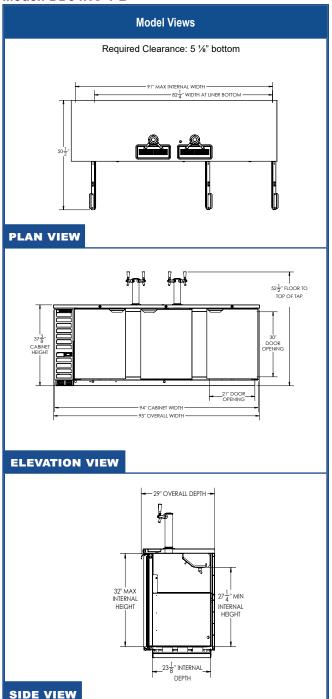

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company

