

# **UNDERCOUNTER** REFRIGERATOR

**MODEL DUC60R** 2-Door





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material** Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/5 Nema Config. NEMA5-15P



### PRODUCT FEATURES

The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.

TEARS PARTS &

**PREMIUM** 

STEAR COMPRES

- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant, prometes faster cool down and efficient energy consumption
- Self-closing doors at 60° with stay open feature.
- Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN** 




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com

## **DETAILS & SPECIFICATIONS**

#### **UNDERCOUNTER DUC60R**

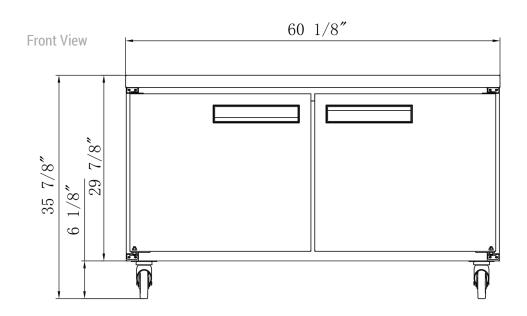

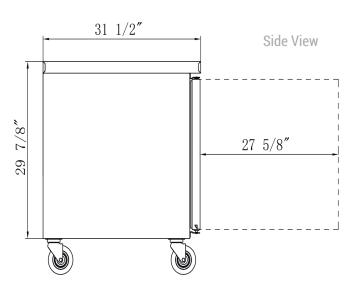

#### **MODEL DUC60R**

115V Rated Voltage Rated Frequency 60Hz 280W **Total Input Power** 2.4A **Total Current** 15.53 cu ft **Total Capacity** 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG 150 PSIG Design Pressure Low Side Insulation Blowing Gas C-Pentane** R290/3.88oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)		_	40HQ CONTAINER CERT.
DUC60R	60 1/8 x 31 1/2 x 36	61 5/8 x 33 1/8 x 39 3/8	231 lbs	2	30









AQ AutoQuotes









**(**) 1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com