

KM-ICD-49SD

50 in. 8 Tub Ice Cream Dipping Cabinet Display Freezer with Sliding Glass Door

Features:

Dimensions

Certification

compliant

Н

Interior LED lighting

Front-facing temperature control

Plug Type: 5-15P, Hz: 60, Voltage: 115

ETL Listed for Safety and Sanitation NSF

for cleaning or repositioning Ergonomic handle on the side Eco-friendly R-290 Refrigerant

Rolling caster wheels makes it easier to move

Overall dimensions 49.6"W x 28.14" D x 34.45"



year year

Parts & Labor NSF-7 Standards





Dimensions:

Product Depth (in.)	49.6	Product Height (in.) 34.45	
Product Width (in.)	28.14	Capacity (cu. Ft.)	13
Product Weight (lbs.)	154	Packaging Dimensions (in.)	52x28.8x37


Electrical:


Rated Voltage	115 V	Rated Frequency	60 Hz
Rated Current	4 A	Refrigerant	R290
Plug Type	5-15P	Horse power	2/5

Cooling:

Temperature Range	-15°F and 10°F	Refrigerant	R290
Defrosting	Manual	Temperature Controller	Electro-mechanical

Specifications:

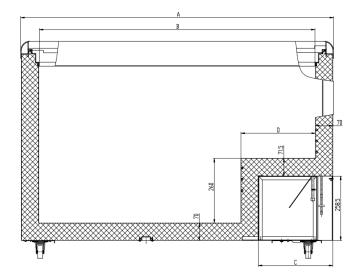



Model NI.	Α	В	С	D
RI-160	665	515	270	250
RI-260	990	840	300	300
RI-360	1260	1110	300	300
RI-460	1530	1380	300	300
RI-560	1800	1650	300	300