



Commercial Countertop Gas Charbroilers, Natural / LP

Models: NGCB-24R / NGCB-36R / NGCB-48R

The Spectrum Gas Charbroilers are designed with durable stainless steel construction and cool-touch front plate rail.

These units are equipped with infinite heat controls, high-performance burners, heavy-duty cast iron top grates, removable grease tray(s).

Includes an LP conversion kit.

Standard Features

- ♦ High performance burners, each with output of 35,000 BTU
- Infinite heat controls
- Stainless steel 10 gauge radiant burner covers with field convertible briquette rock kits (sold separately)
- Stainless steel insulated double-wall body, adjustable legs 4" to 6" and grease tray; non-skid feet
- Heavy-duty reversible cast iron grate, adjusts to three (3) height positions
- 5" cool-touch stainless steel front plate rail provides safety and knob protection
- ◆ 3-1/2" full-width grease trough
- Standing pilot ignition system, one per burner
- ♦ 3/4" rear gas connection with regulator
- Conversion kit allows the use of propane or natural gas
- CSA listed for commercial and indoor use
- One year parts and labor warranty

Models

NGCB-24R

Burners: 2 BTU/total per HR: 70,000 Grate surface: 24" x 20"

NGCB-36R

Burners: 3
BTU/total per HR: 105,000
Grate surface: 36" x 20"

NGCB-48R

BTU/total per HR: 140,000 Grate surface: 48" x 20"

Project	
Item #	
Quantity	





NGCB-24R









Accessories

BRIQUETTE ROCK KITS

NGCB-P11-2 24" Briquette rock kit
NGCB-P11-3 36" Briquette rock kit
NGCB-P11-4 48" Briquette rock kit
NGCB-P7 Replacement briquettes - 24 pcs/bag

CLEANING BRUSHES

BR-27 Oven/broiler brush & scraper, carbon wires, 27" wooden handle
BR-30 Oven/broiler brush, stainless steel bristles, 30" handle
BR-31 31" Commercial broiler brush with steel wire bristles
BR-21 Dual-headed wire oven brush with 28" stainless steel handle

For California Customers




MARNING: Cancer and Reproductive Harm - <u>www.P65Warnings.ca.gov</u>

Winco®, DWL International Trading, LLC

www.wincous.com | equipsales@wincous.com



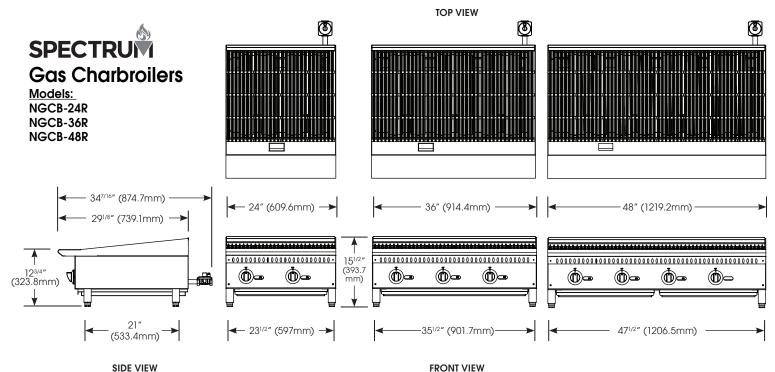

Specifications

MODEL	DESCRIPTION	# OF BTU/BURNER	TOTAL	PRESSURE	DIMENSIONS		GRATE SURFACE		SHIP		
			BURNER	BTU/HR	IN. W.C.	LENGTH	DEPTH	HEIGHT	LENGTH	DEPTH	WEIGHT
NGCB-24R	Spectrum Gas Charbroilers	2		70,000		24" (609.6mm)	34-7/16" (874.7mm) includes gas inlet pipe at rear	15-1/2″	24" (609.6mm)	20" (508mm)	154 lbs (70 kg)
NGCB-36R		3	35,000	105,000		36" (914.4mm)			36" (914.4mm)		220 lbs (100 kg)
NGCB-48R		4		140,000		48" (1219.2mm)			48" (1219.2mm)		277 lbs (126 kg)

Gas Requirements and Information

- Natural or LP gas main supply required
- ullet 3/4" NPT male connection, all units supplied with natural gas and convertible LP gas regulator

THESE UNITS ARE SUITABLE FOR INSTALLATION ON NON-COMBUSTIBLE SURFACE(S) ONLY.

Combustible clearances: 6" sides (152mm) / 6" rear (152mm) / 4" floor (102mm)

Noncombustible clearances: 0" sides (0mm) / 6" rear (152mm) / 4" floor (102mm)

Product Specs Gas Charbroilers

The Gas Charbroiler models NGCB-24R / NGCB-36R / NGCB-48R as manufactured by Winco®, Lodi, NJ 07644.

The Gas Charbroiler shall be rated at 35,000 BTU per burner, 10 gauge stainless steel radiant burner covers, standing pilot, 3/4" rear gas connection with regulator and overall height from 13-1/2" to 15-1/2". The Gas Charbroiler shall consist of heavy-duty reversible cast iron grate(s), two (2) / three (3) / four (4) burners, standing pilot ignition system, stainless steel insulated double wall body, grease tray(s). Natural gas supplied standard, conversion kit included for LP.

Not to be used on casters.

CSA listed for commercial and indoor use

Warranty consists of one year parts and labor.

Winco®, DWL International Trading, LLC

www.wincous.com | equipsales@wincous.com

New Jersey Headquarters: 65 Industrial Road, Lodi, NJ 07644 Tel. 1.888.946.2682 | Fax: 1.888.946.2632

California Distribution Center 14950-14952 Valley View Avenue, La Mirada, CA 90638 Tel. 1.888.946.2652 | Fax: 1.562.926.5678 Florida Distribution Center 10800 NW 103rd St. Bldg 22, Ste 11, Miami, FL 33178 Tel. 1.786.536.4656