



Refrigerated Bakery Display Case

MODEL #RBD30C.

CABINET CONSTRUCTION

LED lighted interior saves energy by producing less heat and maximizes visibility

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function. Shelf rails accommodate full size food pans for storage flexibility.

Maximum Visibility and Convenience

REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Four caster wheels
- Stain, rust, and odor resistant
- Built-in LED lighting
- 2 adjustable shelves
- Quick-Installation and Movability
- Clear, Wide Glass Front
- Maximum Visibility and Convenience
- Digital temperature controls and display.
- Auto defrost



Refrigerated Bakery Display Case

MODEL # R B D 3 0 C



Parts & Labor



Compressor



TECHNICAL DATA

Dimensions

Exterior Dimensions	70.9"L x 28.75"W x 55.1"
Interior Dimensions	67"W x 25"D x 32.3"H
Net Weight	67 lb.
Packaging Dimensions	75.3W x 33.2"D 59.9"H

Construction

Exterior Material	430 Stainless Steel/glass
Interior Material	304 Stainless Steel/glass
Insulation Material	Foamed-In-Place Polyurethane
Shelf Material	Epoxy-Coated Steel

Cooling


Temperature Range	36° F - 40° F
Refrigerant	R290
Max. Ambient Temperature	100° F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/2

Electrical


Voltage	115
Amps	8.5
Hz	60
Phase	1
Plug Type	NEMA 5-15P

PLAN VIEW

Front View:

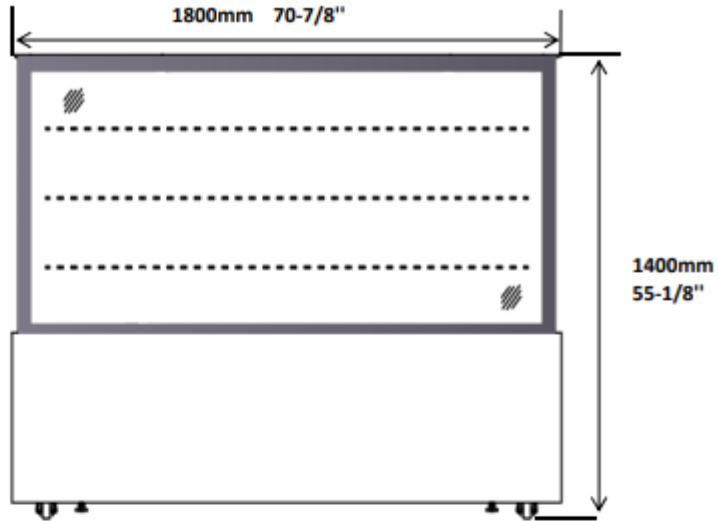

Side View:

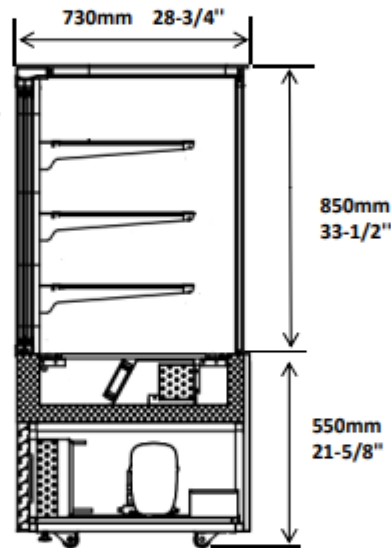

Back View:

