

29 in. One-Door Reach-In Refrigerator

MODEL # RIR-1D-SS-19C



CABINET CONSTRUCTION

- Heavy duty all-stainless-steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.
- LED lighted interior saves energy by producing less heat and maximizes visibility for quick product retrieval.
- Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency
- Removable one-piece grill simplifies cleaning and servicing. Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

- Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.
- “No stoop” lower shelf raises product to a higher level for easy access.

SHELVING

- 3 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES


- Preprogrammed digital controls feature auto-defrost function
- Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.
- Interior back panel separates shelf and back wall to promote proper airflow.

REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40° F
- 3 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/4 HP
- ETL Safety & Sanitation

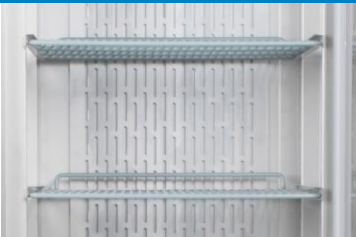



29 in. One-Door Reach-In Refrigerator

MODEL # RIR-1D-SS-19C



TECHNICAL DATA

Dimensions

Exterior Dimensions	29"W x 25.38" D x 82" H
Interior Dimensions	24.38"W x 20.38"D x 53.5"H
Net Volume	41.3 cu. ft.
Net Weight	448 lb.
Gross Weight	530 lb.
Packaging Dimensions	56½"W x 34¼"D x 85½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 207/8" W x 253/16" D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120lb.

Cooling

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	2.76
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

