



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____

STANDARD OVEN RANGE SR SERIES (OPEN BURNERS) SR424 | SR636 | SR1060



SR636

Shown with optional casters, unit comes standard with legs

Sierra Series Ranges feature heavy duty construction, a porcelain oven deck and oven door liner allowing for quick and easy clean-ups. The series includes powerful energy efficient 25,000 BTU cast iron burners.

The Sierra Ranges features a modern look and design, form, function and fit for the most demanding kitchens at an affordable price.

100% manufactured from raw materials to provide the best cooking experience, a high standard of quality, and the highest durability in its class to meet the needs of a commercial kitchen.

STANDARD FEATURES

RANGE

- 1-year parts and labor warranty.
- Available in 24" (610 mm), 36" (915 mm) and 60" (1,525 mm) width.
- Stainless steel front and sides.
- 12" x 12" cast iron top grates designed for easy movement of pots across top sections.
- Deflectors to direct waste to crumb/drip pan.
- Landing ledge, promoting safety and great functionality.
- Orange paint injected aluminum knobs providing for better toughness and durability.
- Easily removable stainless steel crumb/drip pan.
- Accessible pilots through front panel.

OVEN

- Oven with snap action thermostat from 210°F to 550°F and 100% safety shut off.
- 26 1/2" Standard bakery depth on all ovens.
- Double-sided enamel oven cavity (Interior top, bottom, and sides).
- Heavy-duty wire oven rack – 1/8" diameter.
- The standard oven has 3 shelf positions and 1 rack.
- Counterweight balanced doors.
- Units are shipped ready for Natural Gas(NG). A Propane Gas(LP) conversion kit and NG/LP regulator is supplied with the unit.

ACCESSORIES/OPTIONAL

- (4) 6" swivel casters with front locking brakes.
- (6) 6" swivel casters with front locking brakes.
- Additional oven Rack.



SRGR0042222



3560 NW 56th Street
Fort Lauderdale, FL 33309

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax.: 786.661.4100




5659 Royalmount Avenue
Montreal, Qc, Canada H4P 2P9

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax.: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com



www.mvpgroupcorp.com

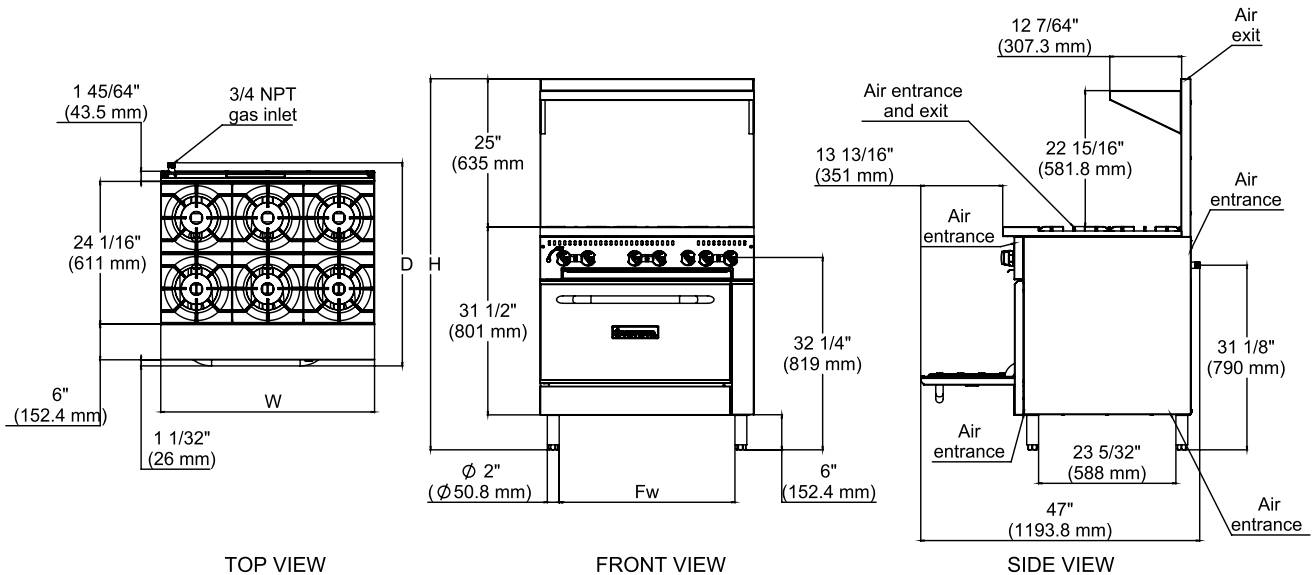

SPECIFICATIONS

Models	Exterior Product Dimensions & Weight						Shipping Crate Dimensions & Weight				Oven - Inside			
	Width (L)	Depth (P)	Height (A)		Fw		Weight	Width	Depth	Height	Weight	Width	Depth	Height
			P.B	P.S	Fw1	Fw2								
SR424	24" (610 mm)				17 19/32" (447 mm)	275 lb (125 kg)	28 5/32" (715 mm)				377 lb (171 kg)	18 57/64" (480 mm)	26 1/2" (673 mm)	15 23/64" (390 mm)
SR636	36" (915 mm)	35" (889 mm)	41 17/64" (1048 mm)	62 33/64" (1588 mm)	29 39/64" (752 mm)	474 lb (215 kg)	40 35/64" (1030 mm)	45 43/64" (1160 mm)	45 9/32" (1150 mm)	509 lb (231 kg)	26 31/32" (685 mm)			
SR1060	60" (1525 mm)				17 19/32" (447 mm)	29 39/64" (752 mm)	716 lb (325 kg)	40 35/64" (1030 mm)			816 lb (370 kg)	18 57/64" – 26 31/32" (480 mm – 685 mm)		

UTILITY INFORMATION

GAS SUPPLY								
Models	Burners (Range)	Propane	Natural	Burners (Oven)	Propane	Natural	Manifold Pressure	
		BTU/h	BTU/h		BTU/h	BTU/h	Natural Gas	Propane Gas
SR424	4	100,000	100,000	1	27,000	30,000	4" W.C	10" W.C
SR636	6	150,000	150,000	1	33,000	35,000		
SR1060	10	250,000	250,000	2	60,000	65,000		

- Manifold pressure is 4" W.C (Natural Gas) or 10" W.C (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

* NOTE: In line with its policy to continually improve its product, Sierra Range reserves the right to change materials and specifications without notice.

INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org