

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

HORIZONTAL BOTTLE COOLERS

DW49HC Deep Well Series Hydrocarbon Series

MODEL: DW49HC-B



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel
- · Galvanized steel interior and floor
- Full electronic control
- Tops include easy glide, stainless steel lids (2)
- · Stainless steel countertop with integral glass stops
- Three (3) epoxy coated adjustable wire dividers
- · Bottle opener and cap catcher standard
- Constructed with high cooling RPM fans to provide fast cooling

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel interior
- Wire divider
- Lid locks
- 3" Casters or 6" adjustable leg with plate
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- · Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Forced air refrigeration system holds product between 36°- 40°F












MODEL	DW49HC-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	50"	
Depth Overall	26 ½"	
Depth Overall with Cap Catcher	27 ¾"	
Height Overall	33 ¾"	
Number of Lids	2	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	13.7	
Internal Width Overall (in)	46"	
Internal Depth Overall (in)	22 3/4"	
Internal Height Overall at Step (in)	15 ½"	
Internal Height Overall (in)	26 ¾"	
Number of Dividers	3	
12 oz. Bottle Capacity	17 ½ Cases	
12 oz. Can Capacity	23 ¾ Cases	
ELECTRICAL DATA		
Full Load Amperes	2.5	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1702	
Heat Rejection (BTU/Hr)	2553	
Charge (lbs/grams)	0.2314/105	
SHIPPING DATA		
Gross Weight - Crated	274 lbs	
Height - Crated	41"	
Width - Crated	52"	
Depth - Crated	30"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Horizontal Bottle Coolers - Deep Well Model: DW49HC-B

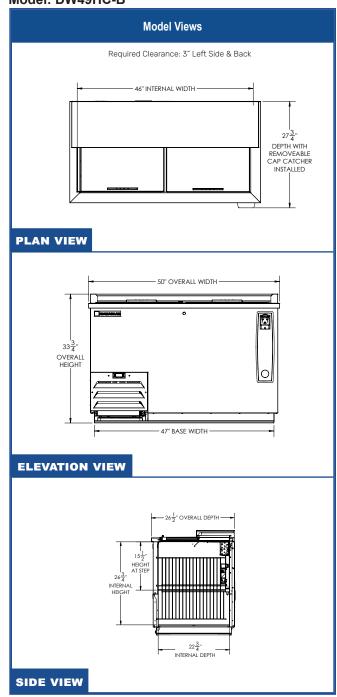



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.