Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

UNDERCOUNTER REFRIGERATOR DRAWERS

UCRD72AHC Solid Door Refrigerator With Door/Drawers Hydrocarbon Series

MODEL: UCRD72AHC-4

3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty**



CABINET CONSTRUCTION

- Stainless steel front, sides, top, door, drawers and grille (galvanized) steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- · Right or left hinged door
- Lock (doors only)
- · Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	UCRD72AHC-4	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall with Handle & Bumper	32"	
Height Overall with 6" Casters	34 %"	
Number of Drawers	4	
Drawer Openings	(4) 19 ½" x 9 ¾"	
Number of Doors	1	
Depth with Door Open 90°	52 1⁄4"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	17.1	
Internal Width Overall (in)	68"	
Internal Depth Overall (in)	15 %"	
Internal Height Overall (in)	23"	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	3.0	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)	1350	
Heat Rejection (BTU/Hr)	2025	
Charge (lbs/grams)	0.2646/120	
SHIPPING DATA		
Gross Weight - Crated	372 lbs	
Height - Crated	39"	
Width - Crated	75"	
Depth - Crated	33"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Undercounter Refrigerator with Door/Drawers Model: UCRD72AHC-4

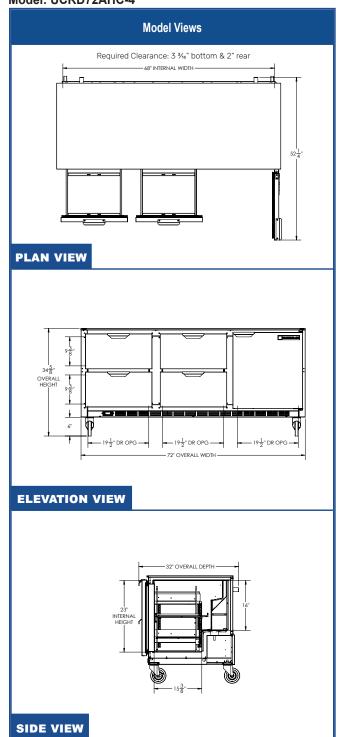

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

