BEVER	AGE-AIR
-------	---------

SIDE MOUNT	UNDERCOUNTER	DRAWER	REFRIGERATOR

UCRD119AHC Solid Doors Refrigerator With Drawers Hydrocarbon Series

3 Year Parts/Labor Warranty
Additional 4 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, drawers and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on lift-off hinges
- Magnetic gasket attached to each door for positive seal
- Six (6) epoxy-coated steel wire shelves
- Field-reversible doors
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (doors only)
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	UCRD119AHC-2			
EXTERNAL DIMENSIONAL DATA				
Width Overall	118 %"			
Depth Overall with Handle & Bumper	34 ¾"			
Height Overall with 6" Casters	34 ½"			
Number of Drawers	2			
Drawer Openings	21 %" x 10 %" 21 %" x 10 ¼"			
Depth with Drawer Extended	57 ½"			
Number of Doors	3			
Depth with Door Open 90°	55 1/4"			
INTERNAL DIMENSIONAL DATA				
NET Capacity (cubic ft.)	40.5			
Internal Width Overall (in)	114 1/8"			
Internal Depth Overall (in)	26"			
Internal Height Overall (in)	25"			
Number of Shelves	6			
ELECTRICAL DATA				
Full Load Amperes	Load Amperes 5.0			
REFRIGERATION DATA				
Horsepower	1/3			
Capacity (BTU/Hr)	2629			
Heat Rejection (BTU/Hr)	3943.5			
Charge (lbs/grams)	0.3086/140			
SHIPPING DATA				
Gross Weight - Crated	563 lbs			
Height - Crated	48"			
Width - Crated	122"			
Depth - Crated	37"			

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Undercounter Doors/Drawers Refrigerator - Side Mount Model: UCRD119AHC-2

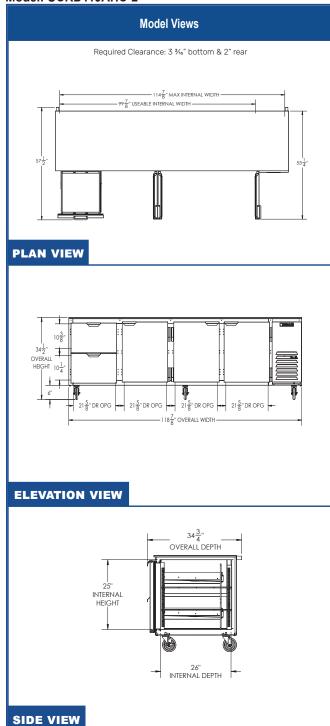

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug set.

