



Two-Door Reach-In Refrigerator

MODEL #RIR-2D-SS

CABINET CONSTRUCTION

Heavy duty all-stainless-steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

LED lighted interior saves energy by producing less heat and maximizes visibility for quick product retrieval.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing. Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf raises product to a higher level for easy access.

SHELVING

6 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to

REACH-IN REFRIGERATOR


Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40° F
- 6 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/5HP
- ETL Safety & Sanitation



Parts & Labor
NSF-7 Standards

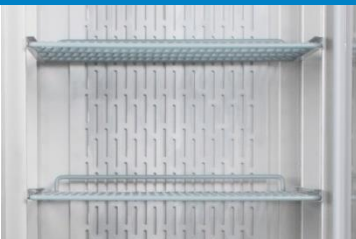



Two-Door Reach-In Refrigerator

MODEL # RIR-2D-SS



TECHNICAL DATA

Dimensions

Exterior Dimensions	54"W x 32¼"D x 82 ½"H
Interior Dimensions	49 3/8"W x 27 1/8"D x 60¼"H
Net Volume	41.3 cu. ft.
Net Weight	439 lbs.
Packaging Dimensions	56¼"W x 34¾"D x 85½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(6) 207/8"W x 253/16"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	90lb.

Cooling

Temperature Range	33° F - 40° F
Refrigerant	R290
Max. Ambient Temperature	90° F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	4.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

