



PROJECT NAME:	
LOCATION:	
ITEM:	QTY:
MODEL:	

SRSP-18 | SRSP-18-2 **GAS STOCK POT SRSP SERIES**

Sierra gas stock pot 100% manufactured from raw materials to provide the best cooking experience, a high standard of quality, and the highest durability in its class to meet the needs of a commercial kitchen.

The Sierra range SRSP stock pot range is ideal for heating soups, stews, and chili. It has one burner with inner and outer rings that can be controlled independently to customize pot heating and ensure satisfactory cooking. The grate is cast iron for excellent heat transmission from the burners to the pot.



Unit shown with optional casters. Unit ships with legs as standard

STANDARD FEAT

STOCK POT RANGE

- ♦ Stock pot range: (1) 3-ring burner and ♦ Lower cabinet storage cavity. (2) 3-Ring Burners.
- Stainless steel panel and sides.
- ♦ for easy movement of pots across top sections.
- crumb/drip pan.
- Large front panel, promoting safety and great functionality.
- Orange paint injected aluminum knobs providing for better toughness and durability.

- ♦ Easily removable stainless steel crumb/drip pan.
- 18" x 21" cast iron top grates designed & Heavy duty legs with adjustable
 - Units are shipped ready for natural gas (NG). A propane gas (LP) conversion kit and NG/LP regulator is supplied with the unit.

THREE RING BURNER

- § 90,000 BTU total output per burner.
- Meat selection from simmer to high heat.
- Burner utilizes two adjustable gas valves for the inner and outer rings.

ACCESSORIES/OPTIONAL

- (6) 6" swivel casters with front locking brakes.
- Propane gas (LP)/natural gas (NG) conversion kits.

SRSP05172022










TECHNICAL DRAWINGS

GAS STOCK POT SRSP SERIES SRSP-18 | SRSP-18-2

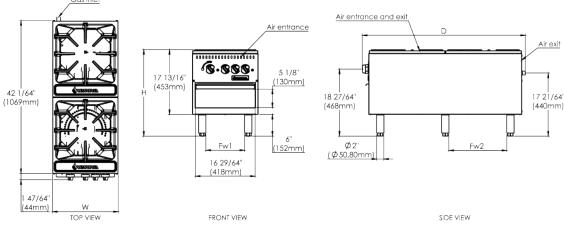

SPECIFICATIONS

	Exterior Product Dimensions & Weight					Shipping Crate Dimensions & Weight				
Models	Width (W)	Depth (D) Height (H)	Hoight (H)		Fw		Width	Depth	Height	Weight
			neight (n)	Fw1	Fw2	Weight	wiath	Беріп	neight	weight
SRSP-18	18" (460 mm)	23 53/64" (605 mm)	,	10 5/8"	12 51/64" (325 mm)	104 lb (47 kg)	22 3/64" (560 mm)	28 35/64" (725 mm)	24 31/64" (622 mm)	121 lb (55 kg)
SRSP-18-2		44 7/8" (1140 mm)	(605 mm)	(270 mm)	33 13/16" (859 mm)	196 lb (89 kg)		46 29/64" (1.180 mm)	24 31/64" (622 mm)	222 lb (101 kg)

UTILITY INFORMATION

GAS SUPPLY								
Models	3-Rings Burners	Propane	Na <mark>t</mark> ural	Manifold Pressure				
		BTU/h	B <mark>T</mark> U/h	Natural Gas	Propane Gas			
SRSP-18	1	90,000	90, <mark>0</mark> 00	5" W.C	10" W.C			
SRSP-18-2	2	180,000	180,000	3 W.C				

- ♦ 90,000 BTU total output per burner.
- Manifold pressure is 5" W.C (natural gas) or 10" W.C (propane gas).
- ♦ 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.
 - * NOTE: In line with its policy to continually improve its product, Sierra Range reserves the right to change materials and specifications without notice.

INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 34" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.

Warranty: 12 months parts & labor. See Sierra Range Price List for full details.

Gas Connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected here by the installer.

Gas pressure: 5"W.C. - Natural Gas | 10"W.C. - Propane.

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear Specify type of gas and altitude, if over 2,000 feet, when ordering. **SIERRA RANGE** is a registered trademark of **MVP Group**.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.





